

ACT-52HC Rechargeable Handheld Transmitter

Key Features

- Innovatively designed metal housing in MIPRO's distinctive aesthetic and ergonomic style.
- Interchangeable capsule module with premium condenser or dynamic options for easy and fast changeovers. The unique multi-layered metal grille protects the capsule against impact, rolling and pop noise, ensuring clarity of sound. The upper grille is easy to detach for cleaning and hygiene practice.
- Patented capsule suspension design virtually eliminates vibration and handling noises.
- The bottom housing with built-in high-efficiency antenna features power switch, mute and setup buttons. Patented end-cap can be reversed to allow shielding of power on/off during performance.
- Backlit LCD displays all operational parameter information.
- Gain setting of 0 dB is the same as microphone input sensitivity. Proprietary high-definition modulation circuit sustains high SPL without distortion.
- World's first ACT™ function provides precise and rapid frequency sync to the receiver.




Microphone Capsules

MU-39	Dynamic Capsule
MU-59	Professional Dynamic Capsule
MU-70	Condenser Capsule
MU-80	Condenser Capsule
MU-90	Condenser Capsule

Accessories

MS-20	Desktop Microphone Tripod
MD-20	Handheld Transmitter Microphone Holder
MP-20	Battery Charger
MP-8	One-slot Charging Station
MP-80	3-in-1 Transmitter Charging Station
MPA-30	Handheld Transmitter Holder
RH-87	Multi-Colored Rear Clips
SW-20	Foam Windscreens

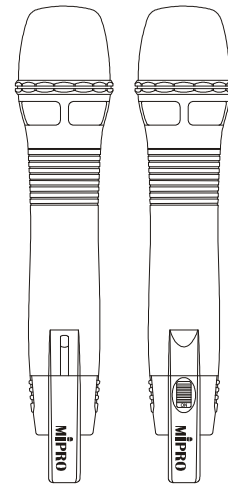

Technical Specifications

Frequency Range	UHF 480 – 934 MHz
Bandwidth	24 MHz
Oscillation Mode	PLL Synthesized
Channel Set-Up	ACT Sync
RF Output Power	10 – 30 mW (country dependent)
Deviation	< ± 40 kHz
Spurious Emissions	< -55 dBc
Gain	0 dB = input microphone sensitivity.
Battery Type	1 × ICR-18500 rechargeable lithium-ion battery
Operating Time	Min. 13 hours
Dimensions (Ø × L)	51 × 250 mm 2 × 9.8 "
Net Weight	Approx. 268 g 9.5 oz



MIPRO Electronics Co., Ltd

Headquarters: 814 Pei-kang Road, Chiayi, 60096, Taiwan
Tel: +886.5.238.0809 | Fax: +886.5.238.0803
www.mipro.com.tw | mipro@mipro.com.tw