


BC-58T II 5 GHz Gooseneck Microphone Transmitter Base

Features

- BC-T Series encloses the transmitter PCB for wireless transmission and can also connect directly with MM-series 4-Pin gooseneck microphone for wired transmission.
- For wired transmission, the output jack requires phantom power from the mixer.
- For wireless transmission, the operational controls are the same as any ACT bodypack transmitter. A built-in 18500 Li-ion battery can be charged by an external charger or simply replace with another spare battery.
- Feature a TALK / MUTE button. When pushing the button to talk, the green indicator on the base and LED ring indicator on MM-206L / 205L / 204L will light up indicating the system in the state of speaking. Push the button again to mute the system and all indicators are off.
- A reinforced base and anti-slip pad for added stability.

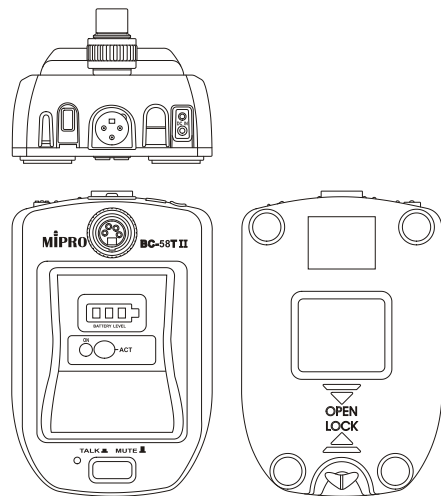

Specifications

Built-in Transmitter	ISM 5.8 GHz
Receiver	ACT-5800 Series
Input Jack	MIPRO 4-Pin XLR, compatible with MM-206L / MM-205L / MM-204L gooseneck microphone
Output Jack	3-Pin XLR
Control Switch	TALK / MUTE switch, with a LED status indicator
Power Supply	Wired: DC 24 – 48 V phantom power Wireless: one 18500 Li-ion battery
Charging Voltage	DC 5 V / 1 A
Color	Black
Dimensions	100 × 78 × 150 mm (W × H × D)
Weight	Approx. 670 g



MIPRO Electronics Co., Ltd

Headquarters: 814 Beigang Road, Chiayi, 600079, Taiwan
Tel: +886.5.238.0809 | Fax: +886.5.238.0803
www.mipro.com.tw | mipro@mipro.com.tw