

ACT-70TC Rechargeable Wideband Bodypack Transmitter

Key Features

- Ultra slim bodypack transmitter with sturdy magnesium alloy housing.
- Innovatively designed battery cover allows easy access to operate buttons and prevents accidental operation.
- Backlit LCD displays all operational parameter information.
- On-the-top features include mute button, mini-XLR connector and antenna.
- Mute button with remote-control jack for easy activation of mute function.
- World's first ACT™ function provides precise and rapid frequency sync to the receiver.
- Selectable impedance for microphone or guitar / line inputs. Five selectable gain settings.
- Mini-XLR input with secure screw lock connector.
- Adjustable belt clip allows wearing transmitter in up or down position.

Microphones


MU-13	Single-sided Earworm Microphone (beige)
MU-23	Omni-directional Headworn Microphone (beige, fixed connector)
MU-23d	Omni-directional Headworn Microphone (beige, detachable cont)
MU-210	Uni-directional Headworn Microphone (beige, fixed connector)
MU-210d	Uni-directional Headworn Microphone (beige, detachable cont.)
MU-53L MU-53LS	Uni-directional Lavalier Microphone (black beige)
MU-55L MU-55LS	Omni-directional Lavalier Microphone (black beige)
MU-53HN MU-53HNS	Uni-directional Headworn Microphone (black beige)
MU-55HN MU-55HNS	Omni-directional Headworn Microphone (black beige)

Accessories

ASP-30	Neoprene Sports Pouch
MJ-70	Remote Mute Switch
MU-40G	Instrument Cable
MP-20	Battery Charger
MP-8	One-slot Charging Station
MP-80	3-in-1 Transmitter Charging Station

Technical Specifications

Housing	Magnesium
Display	Green backlit LCD
Frequency Range	UHF 480 – 934 MHz (country dependent)
Bandwidth	72 MHz
Channel Set-Up	ACT Sync
RF Output Power	10 mW / 50 mW switchable (country dependent)
Deviation	< ±40 kHz
Spurious Emissions	≤ -55 dBc
Gain Setting	+12dB, +6dB, 0dB, -6dB, -12dB (five settings) 0 dB = input microphone sensitivity
Input Connector	Mute switch, Mini-XLR connector and Antenna
Battery Type	1 × ICR 18500 rechargeable lithium-ion battery
Operating Time	Min. 13 hours
Current Consumption	High Power: approx. 125 mA; Low Power: approx. 100 mA
Dimensions (W × H × D)	63 × 70 × 25 mm 2.5 × 2.8 × 1.0 "
Net Weight	Approx. 82 g 2.9 oz

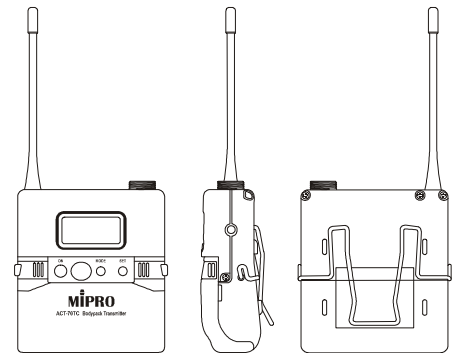

MIPRO Electronics Co., Ltd

Headquarters: 814 Beigang Road, Chiayi, 60096, Taiwan
 Tel: +886.5.238.0809 | Fax: +886.5.238.0803
 www.mipro.com.tw | mipro@mipro.com.tw