

# ACT-72HC Rechargeable Narrowband Handheld Transmitter

## Key Features

- Innovatively designed metal housing in MIPRO's distinctive aesthetic and ergonomic style.
- Basic sterling gray color with other custom-made colors optional.
- Powered by a plug-n-play rechargeable lithium battery. Store the microphone in charger for charging when not in use.
- Simply unscrew the grille to open the battery compartment to replace the lithium battery or charge it in the charger.
- The unique multi-layered metal grille protects the capsule against impact, rolling and pop noise, ensuring clarity of sound.
- Interchangeable capsule module with premium condenser or dynamic options for easy and fast changeovers.
- Backlit LCD displays all operational parameter information.
- Five selectable gain settings with microphone input sensitivity of 0 dB.
- Switchable Manual / Disable audio mute options.
- Switchable High / Low power options.
- The bottom housing with built-in high-efficiency antenna features power switch, mute and setup buttons for programmable gain, limiter, low-cut and RF output power.
- Patented end-cap cover with color-coded channel identification clips. Detach the end-cap cover for parameter setup. Reversible end-cap allows shielding of power on/off or mute switches during performance.
- Transmitter has high-efficiency circuitry design. The included single rechargeable lithium battery can be easily removed or interchanged for charging. The intelligent battery charger maintains a high charge capacity for up to 600 charge cycles for cost saving and is environmentally friendly.



## Microphone Capsules


<b>MU-59</b>	Supercardioid Dynamic Capsule
<b>MU-80</b>	Supercardioid Condenser Capsule
<b>MU-90</b>	Supercardioid Condenser Capsule

## Accessories

<b>MS-20</b>	Desktop Microphone Tripod
<b>MD-20</b>	Handheld Transmitter Microphone Holder
<b>MP-20</b>	Battery Charger
<b>MP-80</b>	3-in-1 Transmitter Charging Station
<b>RH-87</b>	Multi-colored ID Clips
<b>SW-20</b>	Foam Windscreens
<b>TC-18</b>	Transmitter Shielding Case

## Technical Specifications

Frequency Range	UHF 480 – 934 MHz (country dependent)
Bandwidth	24 MHz
Channel Set-Up	ACT Sync
RF Output Power	10 mW / 50 mW (switchable)
Deviation	< ±40 kHz
Spurious Emission	≤ -60 dBc
Oscillation Mode	PLL Synthesized
Frequency Stability	≤ ±0.005% (-10 – +60 °C)
LCD Display	Group, Channel, Frequency, AF gain, Frequency band, RF power, Mute mode, Battery status and error codes
Gain Setting	+6 dB, +3 dB, 0 dB, -3 dB, -6 dB (5 settings) 0 dB = input microphone sensitivity
Max. SPL	142 dB SPL
Battery Type	1 ICR 18500 rechargeable lithium battery
Current Consumption	High Power: approx. 125 mA; Low Power: approx. 100 mA
Operating Time	A 20-minute fast charge provides up to 1 hour operation. Minimum 13 hours of operation per 4-hour full charge.
Dimensions (Ø × L)	51 × 250 mm / 2 × 9.8 "
Net Weight	Approx. 276 g / 9.7 oz

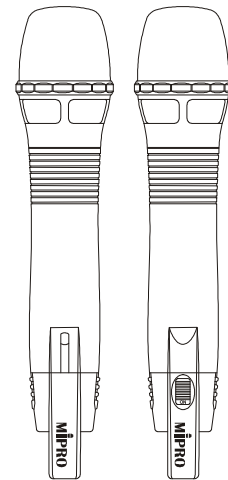

## MIPRO Electronics Co., Ltd

Headquarters: 814 Pei-kang Road, Chiayi, 60096, Taiwan  
Tel: +886.5.238.0809 | Fax: +886.5.238.0803  
www.mipro.com.tw | mipro@mipro.com.tw