


BC-24T II 2.4 GHz Gooseneck Microphone Transmitter Base

Features

- Compatible with MM series 4-pin gooseneck microphones, offering both wired and wireless transmission options.
- For wired transmission, connect the base output to a mixer input with phantom power.
- For wireless transmission, it includes a built-in ISM 2.4 GHz transmitter, compatible with the ACT-2400 series digital wireless system, and works like a bodypack transmitter.
- Powered by a rechargeable 18500 lithium-ion battery, which can be charged externally or replaced with a spare battery.
- Equipped with TALK and MUTE buttons to control the base indicator light and sync with the LED ring lights of MM-206L, MM-205L, and MM-204L microphones.
- The sturdy metal base with a non-slip pad ensures stability and prevents wobbling.

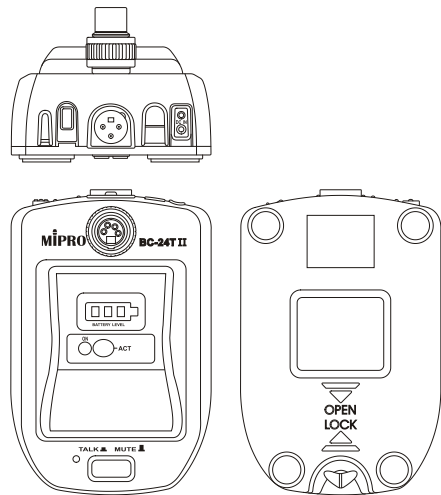

Specifications

Built-in Transmitter	ISM 2.4 GHz
Receiver	ACT-2400 Series
Input Jack	MIPRO 4-Pin XLR, compatible with MM-206L / MM-205L / MM-204L gooseneck microphone
Output Jack	3-Pin XLR
Control Switch	TALK / MUTE switch, with a LED status indicator
Power Supply	Wired: DC 24 – 48 V phantom power Wireless: one 18500 Li-ion battery
Charging Voltage	DC 5 V / 1 A
Color	Black
Dimensions	100 × 78 × 150 mm (W × H × D)
Weight	Approx. 700 g