


MJ-53 Condenser Microphone Adapter

Features

- Accepts a XLR condenser microphone with a MIPRO 4-Pin Mini XLR plug.
- Connects to the XLR jack input of a mixer which provides 12 to 48 V DC phantom power.
- Balanced output transforms the high output impedance of a condenser microphone to a wide frequency response, high dynamic range, high S/N ratio, and low output impedance at about 200 Ω .
- Prevents noise interference in long-distance transmission.
- Rugged metal housing ensures long operating life.
- A belt clip provides for easy wearing.

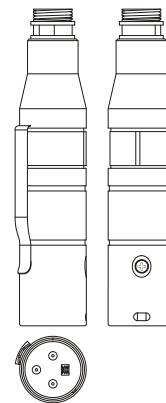

Specifications

Frequency Response	50 Hz (-3 dB) to 20 kHz (0 dB) @ 94 dB SPL
Output Impedance	200 Ω @ 1 V / 1 kHz (Balanced)
Max. Output Voltage	2.52 V @ 1 kHz, 1.0% THD
Dynamic Range	120 dBA
Connector Type	Input: MIPRO 4-Pin Mini XLR Output: XLR
Phantom Power	DC 12 – 48 V Current Drain: 2.0 mA
Dimensions	19 × 90 mm (\varnothing × L)
Weight	Approx. 67 g