


TA-80 UHF Digital Plug-on Transmitter

Features

- The TA-80 features a flat and wide frequency response, ultra-low T.H.D. and noise floor, fast transient response, and high S/N ratio. It solves the problems of tangling microphone cables and defects of analog transmission. Thus, it is an ideal plug-on transmitter to reproduce the natural sound of any premium wired microphone.
- A balanced XLR input jack for any condenser microphone to plug on. It provides 8 gain levels and supplies selectable 12 / 48V, up to 10 mA phantom power for condenser microphone, and can be switched off for the dynamic microphones.
- A built-in high-capacity lithium-ion battery enables up to 8 hours of use per charge. The TA-80 can be plugged into an intelligent charging station to recharge or simply remove the battery to recharge.
- The compact metal housing isolates RF spurious and noise interference. It has built-in a high efficiency transmitting antenna and a green backlit LCD displaying operation parameters.

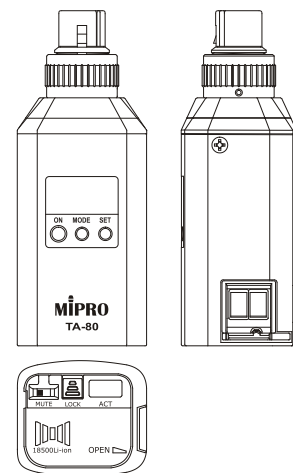

Specifications

Carrier Frequency Range	UHF 480 ~ 960 MHz
Bandwidth	72 MHz
RF Output Power	10 / 50 mW switchable (country dependent)
Gain Setting	0 dB (default), 9 selectable settings
AF Input Level	2V max. at 0 dB
Phantom Power	Selectable 12 V and 48 V at 10 mA max.
Battery Type	ICR 18500 lithium-ion battery
Charger	MP-8T
Note	Refer to the actual product in the event of product discrepancy.



MIPRO Electronics Co., Ltd

Headquarters: 814 Beigang Road, Chiayi, 600079, Taiwan
Tel: +886.5.238.0809 | Fax: +886.5.238.0803
www.mipro.com.tw | mipro@mipro.com.tw