


# MI-580R 5 GHz Digital Stereo Bodypack Receiver

## Features

- The MI-58 Series is a digital IEM system operating in ISM 5.8 GHz band, due to the wider bandwidth, the frequency response range is expanded to 20 Hz – 23 kHz, and with this difference the S/N ratio is greatly improved, the audio latency is reduced, the sound quality is superior to the UHF system. MI-58TD model with Dante Interface is also available.
- Features a user-friendly control system and long-distance transmission, it's ideal for personal and professional stages monitoring and simultaneous interpretation.
- Has Stereo / Mono / Mixed output modes and EQ settings to suit the users' preferences. A Ø 3.5 mm TRS jack provides left/right 100 mW @16 Ω output for earphones. Optional standard or professional Ø 3.5 mm TRS noise-isolating earphones are available.
- The patented battery compartment can be inserted with two AA-type batteries or one rechargeable battery, charging via USB Type-C with the foolproof and safe charging circuit.
- The system offers Engineer Mode (ENG MODE) so the sound engineers have full control in any live performance.

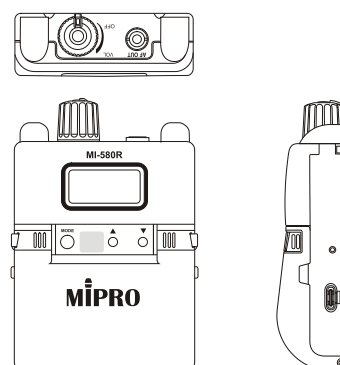

## Specifications

Housing	Glass-fiber reinforced plastic
Display	Backlit LCD
Frequency Band	ISM 5.8 GHz
Modulation Type	Digital modulation
Channel Setting	ACT™ sync
Receiving Mode	True diversity
Latency	< 1.8 ms
Frequency Response	20 Hz – 23 kHz (stereo)
Stereo Separation	> 100 dB
S/N Ratio	109 dBA
THD	0.03% @ 1 kHz
Sensitivity	5 µV input level, S/N > 100 dB
Earphone Jack	3.5 mm TRS
Battery	One 18500 Li-ion or two AA alkaline
Charging	USB Type-C
Dimensions	63 × 95 × 25 mm (W × H × D)
Weight	Approx. 160 g
Optional Accessories	E-8S or E-8P earphones
Note	Refer to the actual product in the event of product description discrepancy