


# MI-909R UHF Digital Stereo Bodypack Receiver

## Features

- Lightweight and rugged case.
- A wideband digital encryption stereo receiver with digital diversity receiving and soft dual-antenna design for comfortable wearing and RF reliability.
- Selectable stereo, mono & mixed output modes.
- EQ settings for preferable sound mode.
- User-friendly control panel for fast and easy setting.
- 3.5 mm TRS jack for two optional MIPRO noise-isolating earphones.
- 16 preset groups with a total of 216 pre-saved channels. User can choose and save custom channel from 2,560 available frequencies.

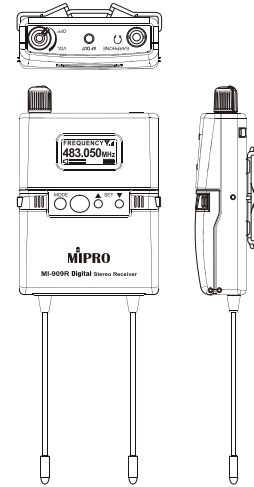

## Specifications

|                       |   |
|-----------------------|---|
| Housing               | Composite of various material   |
| Display               | Backlit LCD   |
| Frequency Band        | UHF 470 – 639 MHz, 705 – 960 MHz (country dependent)                        |
| Bandwidth             | 64 MHz  |
| Modulation Type       | Digital modulation  |
| Channel Setting       | ACT™ sync   |
| Receiving Mode        | Digital diversity receiving   |
| Frequency Response    | 20 Hz – 15 kHz (stereo)   |
| Stereo Separation     | > 95 dB   |
| S/N Ratio             | 95 dBA (stereo)   |
| THD                   | < 0.1% @ 1 kHz  |
| Sensitivity           | 10 μV input level, S/N > 90 dB  |
| Earphone Jack         | 3.5 mm TRS  |
| Output Power          | Left/Right × 120 mW @ 16 Ω  |
| Power Supply          | 2 AA alkaline   |
| Current Consumption   | Approx. 170 mA  |
| Operating Time        | Approx. 6 to 8 hours (depending on volume level)                            |
| Operating Temperature | -10 °C – +60 °C   |
| Optional Accessories  | E-8P or E-8S earphones  |
| Dimensions            | 63 × 82 × 23 mm (W × H × D)   |
| Weight                | Approx. 95 g  |
| Note                  | Refer to the actual product in the event of product description discrepancy |



### MIPRO Electronics Co., Ltd

Headquarters: 814 Beigang Road, Chiayi, 600079, Taiwan  
 Tel: +886.5.238.0809 | Fax: +886.5.238.0803  
 www.mipro.com.tw | mipro@mipro.com.tw

Specifications are subject to change without prior notice. MI023/08