


MM-205L Gooseneck Microphone

Features

- MM-2 Series gooseneck microphones can be bent at wide angles and are ideal for conference room and church applications.
- Multi-layered microphone grille effectively eliminates pop noise.
- 4 pin XLR plug, fits wired BC-100 and wireless BC-T Series conference microphone bases. Combined with LED ring indicator, the speaking status can be identified.

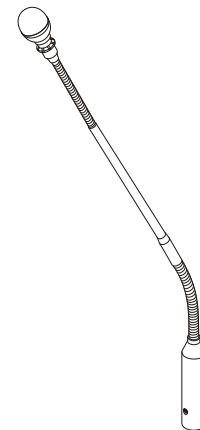

Specifications

Color	Black, with LED ring indicator
Indicator	Red LED ring indicator
Capsule	10 Ø mm unidirectional condenser microphone
Frequency Response	50 Hz – 18 kHz
Sensitivity	-46 ± 3 dBV / Pa (0 dB = 1 V / Pa)
Max. SPL	142 dB
Output Jack	4-Pin XLR male (DC 5 V)
Phantom Power	DC 5 – 9 V
Length	500 mm
Weight	Approx. 180 g
Note	Refer to the actual product in the event of product discrepancy