


MT-24A 2.4 GHz Digital Interlinking Transmitter

Features

- EIA standard half-rack chassis. Connects the outputs of microphones, instruments and other audio equipment with switchable input Mic / Line level.
- Presets 12 channels and 16 ID codes.
- The maximum power output is up to 100 mW.
- Supplies 48 V phantom power for condenser microphones.
- Pairs with the ACT-2400 series or ACT-24R receivers for long-distance wireless transmission.

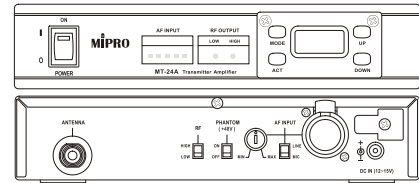

Specifications

Frequency Band	ISM 2.4 GHz
Modulation Type	Digital modulation
Receiver	ACT-2400 series receivers
RF Power Output	Low < 10 mW, High < 100 mW (country dependent)
Phantom Power	48 V
Audio Input	XLR / 6.3 mm TRS combo socket
Power Supply	DC 12 – 15 V, AC 100 – 240 V
Dimensions	210 × 44 × 203 mm (W × H × D)
Weight	Approx. 1.1 kg