

MT-801a Bodypack Transmitter

Key Features

- Lightweight, compact size with sturdy plastic housing.
- Fixed frequency with PLL synthesized technology ensures no need for frequency setup.
- High dynamic range modulation circuit sustains high SPL without distortion.
- Mini-XLR input with secure screw lock connector for lavalier / headworn mics and guitar.
- High-efficiency circuitry design provides more than 17 hours of operation from 2 AA batteries (depending on the battery quality).

Microphones


MU-13	Single-sided Earworn Microphone (beige)
MU-23	Omni-directional Headworn Microphone (beige, fixed connector)
MU-23d	Omni-directional Headworn Microphone (beige, detachable cont)
MU-210	Uni-directional Headworn Microphone (beige, fixed connector)
MU-210d	Uni-directional Headworn Microphone (beige, detachable cont.)
MU-53L MU-53LS	Uni-directional Lavalier Microphone (black beige)
MU-55L MU-55LS	Omni-directional Lavalier Microphone (black beige)
MU-53HN MU-53HNS	Uni-directional Headworn Microphone (black beige)
MU-55HN MU-55HNS	Omni-directional Headworn Microphone (black beige)

Accessories

ASP-10	Neoprene Sports Pouch
MU-40G	Instrument Cable
TC-18	Transmitter Shielding Case

Technical Specifications

Frequency Range	480 - 934 MHz
Bandwidth	24 MHz
Oscillation Mode	PLL Synthesized fixed-frequency
RF Output Power	10 - 30 mW (country dependent)
Spurious Emissions	< -55 dBc
Max. Input Level	0 dBV
Battery Type	AA alkaline × 2
Current Consumption	Approx. 84 mA
Dimensions (W × H × D)	63 × 105 × 21 mm / 2.5 × 4.1 × 0.8 "
Weight	Approx. 90 g / 3.2 oz, excluding batteries

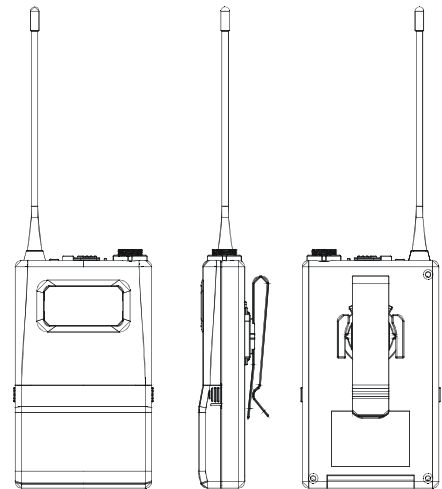

MIPRO Electronics Co., Ltd

Headquarters: 814 Pei-kang Road, Chiayi, 60096, Taiwan
Tel: +886.5.238.0809 | Fax: +886.5.238.0803
www.mipro.com.tw | mipro@mipro.com.tw