


MTS-100 UHF Digital Stationary Transmitter

Features

- Can be settled on a desk, in a cabinet, or used along with a broadcast console mixer for speaking.
- Operates in the universal user license-free ISM band: CEPT/EU 863 – 865 MHz or USA 926 – 928 MHz.
- Digital modulation.
- Presets 16 channels. At least 3 compatible channels can be used simultaneously at the same venue.
- Switchable LOW < 10 mW or HIGH < 50 mW power output. Low power for battery saving and High power for extending distance.
- Supplies 48 V phantom power. Adjustable AF level knob. The XLR combo jack connector accepts either dynamic or condenser microphones.
- Pairs with MTG-100R / MTG-100Ra receiver.

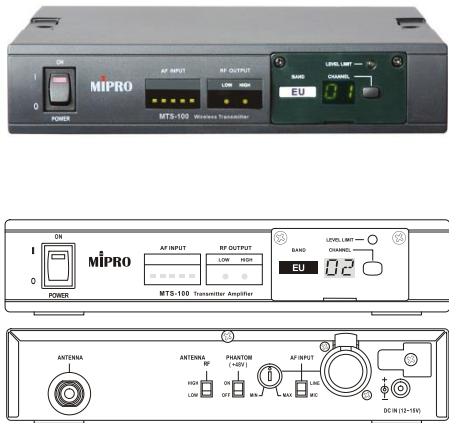

Specifications

Display	Numeric LED
Frequency Band	CEPT/EU: 863 – 865 MHz & USA: 926 – 928 MHz
Channel Setting	Manually
Preset Channels	16 preset channels
RF Power Output	HIGH < 50 mW, LOW < 10 mW (country dependent)
Power Supply	DC 12 – 15 V, AC 100 – 240 V
Dimensions	210 × 44 × 206 mm (W × H × D)
Weight	1.1 kg
Note	Refer to the actual product in the event of product description discrepancy