


ACT-500H

UHF Analog Handheld Transmitter

FEATURES

- MIPRO's analog narrowband handheld transmitter designed for use with ACT-500 Series receivers, delivering clear and stable audio performance.
- Ergonomic matte black metal housing offers a comfortable grip and ultra-low handling noise, with a professional and refined appearance.
- Patented multifunction control module integrates the power switch, mute, setting keys, LCD display, and locking slider to prevent accidental operation.
- Equipped with a uniquely designed capsule module—removable upper grille for cleaning and threaded lower grille for impact and noise protection.
- Standard with MU-80A supercardioid condenser capsule module; supports interchangeable MIPRO condenser or dynamic capsule modules and compatible ones from other brands.
- Supports essential functions including mute mode, input sensitivity, and RF output power with intuitive and clear operation.
- Five-stage gain adjustment enhances input level control for improved audio capture.
- Incorporates MIPRO's exclusive ACT™ function for fast and accurate frequency synchronization.
- Patented dual-purpose battery compartment allows switching between AA and rechargeable Li-ion batteries for added flexibility.
- Built-in USB Type-C charging port and contacts with foolproof protection support cable and cradle charging.
- Lower housing features a replaceable color-coded ID ring for channel identification. A patented antenna cover houses a high-efficiency wideband transmitting antenna.

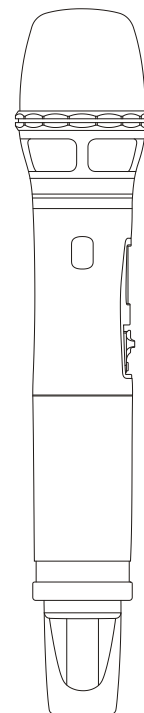

SPECIFICATIONS

| | |
|----------------------|---|
| Frequency Range | UHF 480–934 MHz (country dependent) |
| Bandwidth | 24 MHz |
| Display | Backlit LCD displays channel, battery status and setting menu |
| Control Interface | ACT sync sensor, setting buttons and mute button |
| Mic. Capsule Modules | MU-80A condenser or other compatible capsule modules |
| Audio Control | AF Gain |
| Gain Setting | -6 dB to +6 dB / 3 dB per segment |
| RF Power Output | 10 mW / 50 mW switchable (country dependent) |
| Power Supply | One 18500 Li-ion battery or two AA alkaline |
| Battery Charging | MP-800 / MP-820 charging dock or USB Type-C |
| Dimensions | 51 × 272 mm (Ø × L) |
| Weight | Approx. 320 g |