


ACT-500H

UHF Analog Handheld Transmitter

FEATURES

- MIPRO's analog narrowband handheld transmitter designed for use with ACT-500 Series receivers, delivering clear and stable audio performance.
- Ergonomic matte black metal housing offers a comfortable grip and ultra-low handling noise, with a professional and refined appearance.
- Patented multifunction control module integrates the power switch, mute, setting keys, LCD display, and locking slider to prevent accidental operation.
- Equipped with a uniquely designed capsule module—removable upper grille for cleaning and threaded lower grille for impact and noise protection.
- Standard with MU-80A cardioid condenser capsule module; supports interchangeable MIPRO condenser or dynamic capsule modules and compatible ones from other brands.
- Supports essential functions including mute mode, input sensitivity, and RF output power with intuitive and clear operation.
- Five-stage gain adjustment enhances input level control for improved audio capture.
- Incorporates MIPRO's exclusive ACT™ function for fast and accurate frequency synchronization.
- Patented dual-purpose battery compartment allows switching between AA and rechargeable Li-ion batteries for added flexibility.
- Built-in USB Type-C charging port and contacts with foolproof protection support cable and cradle charging.
- Lower housing features a replaceable color-coded ID ring for channel identification. A patented antenna cover houses a high-efficiency wideband transmitting antenna.

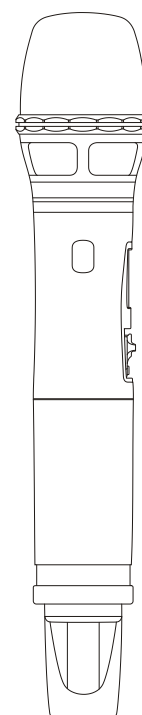

SPECIFICATIONS

Frequency Range	UHF 480–934 MHz (country dependent)
Bandwidth	24 MHz
Display	Backlit LCD displays channel, battery status and setting menu
Control Interface	ACT sync sensor, setting buttons and mute button
Mic. Capsule Modules	MU-80A condenser or other compatible capsule modules
Audio Control	AF Gain
Gain Setting	–6 dB to +6 dB / 3 dB per segment
RF Power Output	10 mW / 50 mW switchable (country dependent)
Power Supply	One 18500 Li-ion battery or two AA alkaline
Battery Charging	MP-800 / MP-820 charging dock or USB Type-C
Dimensions	51 × 272 mm (Ø × L)
Weight	Approx. 320 g