


ACT-32T UHF Analog Bodypack Transmitter

Features

- An LCD on the panel displays the operating information.
- Powered by two AA alkaline batteries.
- In addition to the power switch and the mute button, functions such as input sensitivity, power output, and mute modes are also programmable.
- The world's first ACT™ function provides precise and rapid frequency sync to the receiver.
- 5 switchable gain levels.
- Mute button and remote-control jack allow quick setting of MUTE function.
- Innovatively designed battery cover allows easy access to operate buttons and prevents accidental operation.

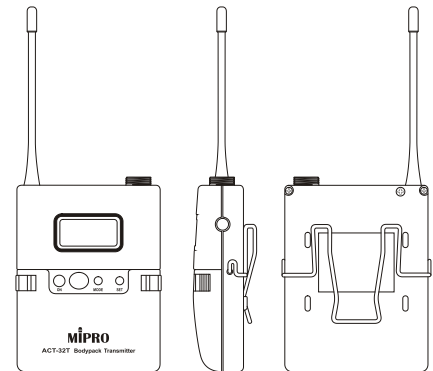

Specifications

Frequency Range	UHF 480 – 934 MHz (country dependent)
Bandwidth	24 MHz
Display	Backlit LCD
Mic. Capsule Modules	Work with all MIPRO's lavalier and headworn mics
Input Connector	MIPRO 4-Pin Mini XLR
AF Sensitivity	Preset at 0 dB (equal to capsule sensitivity) 5 switchable levels: -12 dB to 12 dB
RF Power Output	10 mW / 50 mW switchable (country dependent)
Spurious Emission	< 4 nW
Battery Type	Two AA alkaline
Dimensions	63 × 82 × 22 mm (W × H × D)
Weight	Approx. 86 g



MIPRO Electronics Co., Ltd

Headquarters: 814 Beigang Road, Chiayi, 600079, Taiwan
Tel: +886.5.238.0809 | Fax: +886.5.238.0803
www.mipro.com.tw | mipro@mipro.com.tw

Specifications are subject to change without prior notice. CE024/02