


ACT-580T 5 GHz Digital Bodypack Transmitter

Features

- Newly designed compact and lightweight housing for easy wearing.
- The panel integrates a power switch and a backlit LCD for easy operation and clear view of all operating information.
- The world's first ACT™ function provides precise and rapid frequency sync to the receiver.
- The high dynamic range audio input prevents saturation distortion and matches up low and high input impedance.
- Mute button and remote-control jack allow quick setting of MUTE function.
- The patented battery compartment can be inserted with two AA-type batteries or one rechargeable Li-ion battery, charging via USB Type-C with the foolproof and safe charging circuit. The second-generation ACT-580T features charging contacts and can also be placed on an optional single-slot or dual-slot charging station for charging.
- A belt clip for easy wearing.

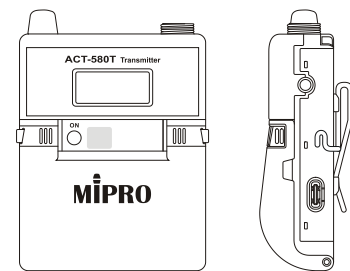

Specifications

Frequency Band	ISM 5.8 GHz
Display	Backlit LCD
Mic. Capsule Module	Work with all MIPRO's lavalier and headworn mics
Input Connector	MIPRO 4-Pin Mini XLR
Max. Audio Input	6.5 dBV
RF Power Output	20 mW (country dependent)
Battery Type	One 18500 Li-ion battery or two AA alkaline
Battery Charging	MP-800 / MP-820 charging station or USB Type-C
Dimensions	63 × 80 × 25 mm (W × H × D)
Weight	Approx. 82 g