


MTG-100R UHF Digital Receiver (Rechargeable Battery)

Features

- Industry's smallest, ultra-compact housing.
- The LCD screen displays various function settings and battery status.
- Operates in the universal user license-free ISM band: CEPT/EU 863 – 865 MHz and USA 926 – 928 MHz.
- Digital modulation.
- Presets 16 channels. At least 3 compatible channels can be used simultaneously at the same venue.
- Manual ACT™ sync channel set-up or via charger carry case.
- True diversity receiving with proprietary built-in dual antennas
- Up to 60-meter line-of-sight reception range.
- Channel-lock setting prevents accidental change.
- The ethernet interface allows system setting and management.

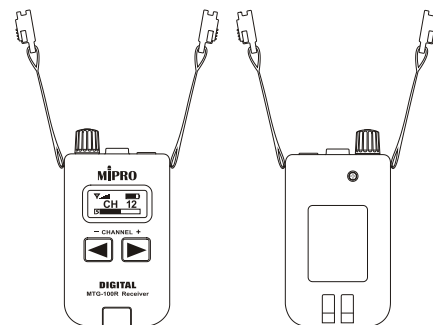

Specifications

Display	Backlit LCD
Frequency Band	CEPT/EU: 863 – 865 MHz USA: 926 – 928 MHz
Receiving Mode	True diversity receiving
Preset Channels	16 preset channels
Battery	Rechargeable lithium battery
Optional Accessories	E-20S, E-10S, E-5S
Dimensions	45 × 84 × 21 mm (W × H × D)
Weight	Approx. 67 g
Note	Refer to the actual product in the event of product description discrepancy