


MTG-100R

UHF Digital Receiver (Rechargeable Battery)

FEATURES

- Operates in license-free 863 – 865 MHz / 926 – 928 MHz frequency bands for global use without registration.
- True digital receiving design ensures excellent anti-interference capability and clear, stable audio.
- Transmission range up to 60 meters, suitable for various environments.
- Provides 16 preset frequencies, supporting up to three systems operating simultaneously without interference.
- Equipped with 3.5 mm headphone jack and volume control knob for quick listening adjustments.
- Stereo output design supports single- or dual-ear headphones with natural audio reproduction.
- Backlit LCD displays channel and battery information, with a key lock function to prevent accidental operation.
- Built-in rechargeable lithium battery for easy centralized management and charging, ideal for large-scale rentals, live guided tours, and simultaneous interpretation.

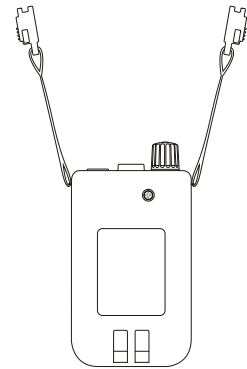

SPECIFICATIONS

Frequency Range	863–865 MHz, 926–928 MHz (country dependent)
Channels	16 preset channels
Receiving Mode	True diversity
Earphone Jack	3.5 mm stereo
Display	Backlit LCD
Control Interface	Channel selection buttons, key lock function, volume control
Power Supply	Rechargeable Li-ion battery
Optional Accessories	Earphones, charging docks, storage and charger carry cases
Dimensions	45 × 84 × 21 mm (W × H × D)
Weight	Approx. 67 g