


MTG-100Ra

UHF Digital Receiver (AA Battery)

FEATURES

- Operates in license-free 863 – 865 MHz / 926 – 928 MHz frequency bands for global use without registration.
- True digital receiving design ensures excellent anti-interference capability and clear, stable audio.
- Transmission range up to 60 meters, suitable for various environments.
- Provides 16 preset frequencies, supporting up to three systems operating simultaneously without interference.
- Equipped with 3.5 mm headphone jack and volume control knob for quick listening adjustments.
- Stereo output design supports single- or dual-ear headphones with natural audio reproduction.
- Backlit LCD displays channel and battery information, with a key lock function to prevent accidental operation.
- Powered by AA batteries with a lightweight body, ideal for guided tours, interpretation, and outdoor use.

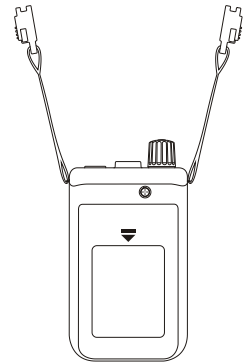

SPECIFICATIONS

| | |
|----------------------|--|
| Frequency Range | 863–865 MHz, 926–928 MHz (country dependent) |
| Channels | 16 preset channels |
| Receiving Mode | True diversity |
| Earphone Jack | 3.5 mm stereo |
| Display | Backlit LCD |
| Control Interface | Channel selection buttons, key lock function, volume control |
| Power Supply | 2 AA alkaline |
| Optional Accessories | Earphones |
| Dimensions | 45 × 84 × 28 mm (W × H × D) |
| Weight | Approx. 63 g |